



Fluid Connector Seal




Profil Sealing Rings: DIN 3869
Guarnizioni in Gomma: DIN 3869
Profildichtringe: DIN 3869

Person Responsible:
Sergio Parzani

Revision:
00

Date:
02/08/2007

This elastomer seal is used as an axial static seal for threaded ports and stud ends in hydraulic fluid power applications in accordance with DIN 3869, ISO 11926, ISO 9974 and ISO 1179.
The cross-section remains practically constant even under high pressure.
The groove dimensions are in accordance with DIN 3852 part 11.

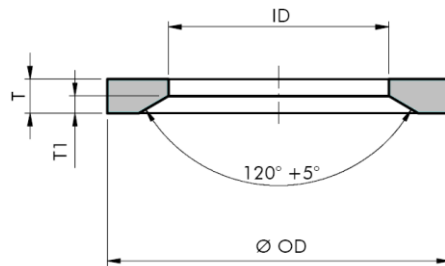


Advantages:

- Minimal mechanical deformation of the cross-section
- Outstanding sealing behaviour over long periods
- No twisting in the groove
- No relative movements during pressure cycles
- Dimensionally stable under pressure
- High leak tightness compared to metal / metal sealing

Application examples in hydraulic components such as:

- Injection molding machines
- Machine tools
- Presses
- Excavators
- Agricultural machines
- Valves for hydraulic circuits

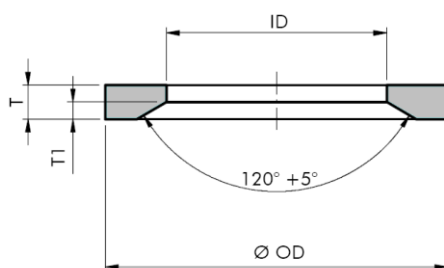

SIZE [ØID X ØOD X T X T1]	COMPOUND	THREAD
6.5 X 9.9 X 1.0 X 0.5	■ NBR Nero / Black 85 ±5	M 8X1
6.5 X 9.9 X 1.0 X 0.5	■ FKM Verde / Green 80 ±5	M 8X1
8.4 X 11.9 X 1.0 X 0.5	■ NBR Nero / Black 85 ±5	M 10X1 - G 1/8 A
8.4 X 11.9 X 1.0 X 0.5	■ FKM Verde / Green 80 ±5	M 10X1 - G 1/8 A
9.8 X 14.4 X 1.5 X 0.8	■ NBR Nero / Black 85 ±5	M 12X1.5
9.8 X 14.4 X 1.5 X 0.8	■ FKM Verde / Green 80 ±5	M 12X1.5
11.6 X 16.5 X 1.5 X 0.8	■ NBR Nero / Black 85 ±5	M 14X1.5 - G 1/4 A
11.6 X 16.5 X 1.5 X 0.8	■ FKM Verde / Green 80 ±5	M 14X1.5 - G 1/4 A
13.8 X 18.9 X 1.5 X 0.8	■ NBR Nero / Black 85 ±5	M 16X1.5
13.8 X 18.9 X 1.5 X 0.8	■ FKM Verde / Green 80 ±5	M 16X1.5
14.7 X 18.9 X 1.5 X 0.8	■ NBR Nero / Black 85 ±5	G 3/8 A
14.7 X 18.9 X 1.5 X 0.8	■ FKM Verde / Green 80 ±5	G 3/8 A
15.7 X 20.9 X 1.5 X 0.8	■ NBR Nero / Black 85 ±5	M 18X1.5
15.7 X 20.9 X 1.5 X 0.8	■ FKM Verde / Green 80 ±5	M 18X1.5
17.8 X 22.9 X 1.5 X 0.8	■ NBR Nero / Black 85 ±5	M 20X1.5
17.8 X 22.9 X 1.5 X 0.8	■ FKM Verde / Green 80 ±5	M 20X1.5
18.5 X 23.9 X 1.5 X 0.8	■ NBR Nero / Black 85 ±5	G 1/2 A
18.5 X 23.9 X 1.5 X 0.8	■ FKM Verde / Green 80 ±5	G 1/2 A
19.6 X 24.3 X 1.5 X 0.8	■ NBR Nero / Black 85 ±5	M 22X1.5
19.6 X 24.3 X 1.5 X 0.8	■ FKM Verde / Green 80 ±5	M 22X1.5
23.9 X 29.2 X 1.5 X 0.8	■ NBR Nero / Black 85 ±5	M 27X2 - G 3/4 A
23.9 X 29.2 X 1.5 X 0.8	■ FKM Verde / Green 80 ±5	M 27X2 - G 3/4 A
29.7 X 35.7 X 2.0 X 1.0	■ NBR Nero / Black 85 ±5	M 33X2 - G 1 A
29.7 X 35.7 X 2.0 X 1.0	■ FKM Verde / Green 80 ±5	M 33X2 - G 1 A
38.8 X 45.8 X 2.0 X 1.0	■ NBR Nero / Black 85 ±5	M 42X2 - G1 1/4 A
38.8 X 45.8 X 2.0 X 1.0	■ FKM Verde / Green 80 ±5	M 42X2 - G1 1/4 A
44.7 X 50.7 X 2.0 X 1.0	■ NBR Nero / Black 85 ±5	M 48X2 - G1 1/2 A
44.7 X 50.7 X 2.0 X 1.0	■ FKM Verde / Green 80 ±5	M 48X2 - G1 1/2 A

Profil Sealing Rings: DIN 3869
 Guarnizioni in Gomma: DIN 3869
 Profildichtringe: DIN 3869

This document is electronically generated and is valid without signature

DISCLAIMER NOTE

The information and data presented herein are, to the best of our knowledge, true and accurate. They are intended for use by persons having technical skill and their own discretion and risk; no warranty or guarantee, expressed or implied, is made and no liability is assumed in connection with any use of such information and data. Nothing herein shall be construed as a recommendation to infringe any existing patent or violate any applicable law.

The distribution of this document is not monitored. This data sheet is not subject to an automatic update.